

APP操作 APP operation

1、新增設備Add equipment


(1) 下載塗鴉APP TUYA SMART，在APP 首頁，點選右上角「+」按鈕，在下拉式選單選擇「新增設備」選單項目。 Download -i-llInstall TUYA SMART , on the APP home page, click the + button in the upper right corner, select Add Device menu item in the pull-down menu.



(2) 在跳轉的介面中，APP 會搜尋附近的設備，點選名為「AC EV Charger」的設備，此時會跳出連接WIFI 的訊息，輸入WIFI 密碼，然後點選「下一步」按鈕。 In the interface of the jump, the APP will search for nearby devices and click on the device named "AC EV Charger." At this time, the information about connecting to WIFI will pop up, enter the WIFI password, and then click the "Next" button.



(3) 裝置進入正在連線WIFI 狀態，當連線完成後，裝置即可新增成功。點選「完成」按鈕，即可跳到裝置詳情頁面。
The device enters the state that is connecting to WIFI, and when the connection is completed, the device can be added successfully. Click the "Finish" button to jump to the device details page.

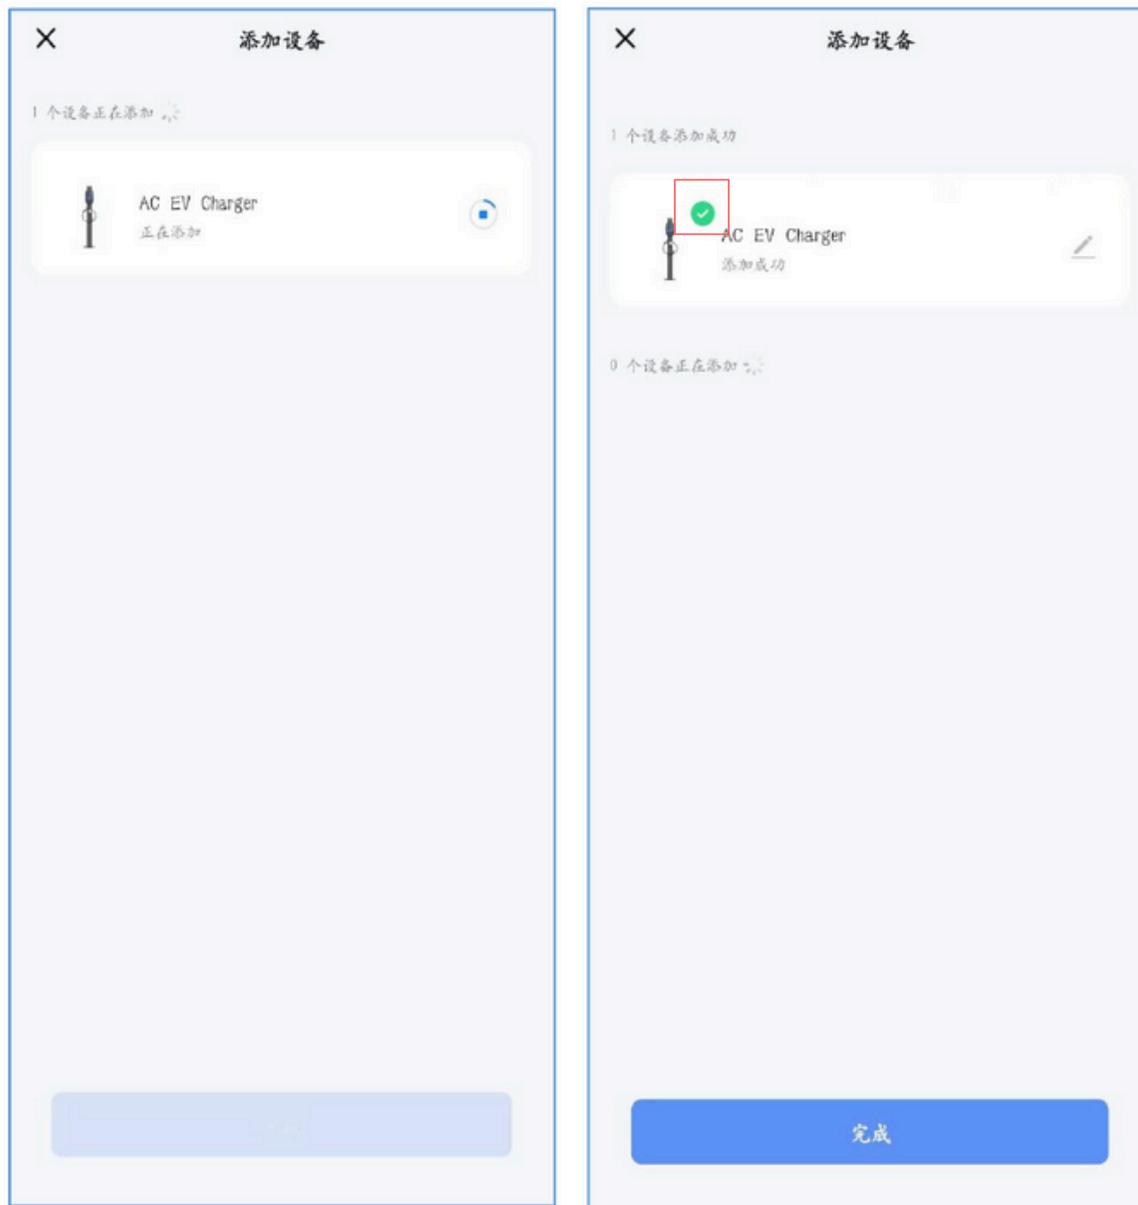

2. 充電操作 Charging operation

設備添加完成後，進入設備詳情頁面，可對充電樁進行操作。

After the equipment is added, enter the equipment details page to operate the charging pile.

(1) 即時充電，充電模式預設為“即時充電”，充電樁未插槍時，頁面顯示為“空閒未插槍”，此時插上充電槍，頁面會顯示為“空閒已插槍”，「右滑合閘充電」按鈕，APP 會發送啟動充電指令給充電樁。

Instant charging, the charging mode defaults to "Instant Charging," When the charging pile is not inserted into the gun, the page will display as "idle not inserted into the gun," then plug in the charging gun, the page will display as "idle inserted into the gun," "right slide closing charging" button, APP will send the start charging command to the charging pile.



充電樁收到啟動充電指令後，會進行充電準備工作，此時頁面顯示為「充電等待」；充電樁啟動完成後，進行充電中狀態，此時頁面顯示為「充電中」；同時顯示電壓、電流、功率等充電資訊。點選「點選關閉電源」按鈕，即可停止充電。

After receiving the charging command, the charging pile will be prepared for charging, and the page will be displayed as "charging waiting." After the charging pile is started, the charging status will be carried out, and the page will be displayed as "charging" at this time; At the same time display voltage, current, power and other charging information. Click the "Tap Power Off" button to stop charging.



(2) 定時充電，點擊充電模式，進行充電模式選擇頁面，在這個頁面中選擇“定時充電”，此時會彈出“時間選擇器”，選擇開始時間和結束時間，點擊“確認”按鈕，返回設備詳情頁面，此時，顯示為「等待上電，定時中」。當充電樁時間到達設定的開始充電時間後，會自動啟動充電；當充電樁時間到達設定的結束充電時間後，會自動停止充電；設定的結束時間與開始時間相同時，表示充電樁無需定時停止充電。如需取消定時充電，進行充電模式選擇頁面選擇「即時充電」即可取消。

Time charging, click the charging mode, charge mode selection page, Select "Timed Charging" in this page. The "Time Picker" will pop up at this time. Select the start time and end time. Click the "Confirm" button to return to the device details page. At this time, it is displayed as "Waiting for power up, timing in." When the charging pile time reaches the set start charging time, it will automatically start charging; When the charging pile time reaches the end of the set charging time, it will automatically stop charging; When the set end time is the same as the start time, it means that the charging pile does not need to stop charging at a regular time. If you need to cancel timed charging, select "Instant Charging" on the charging mode selection page to cancel.



3. 其他操作(功率限制)

點擊底部的“設定”按鈕，切換到設定頁面，點擊“充電電流”，在彈出的選擇器中，選擇想要限制的最大電流；限制的最大電流不能小於充電樁的最小限制，如果小於充電樁的最小限制，則取充電樁的最小限制；限制的最大電流不能大於充電樁的最大限制，如果大於充電樁的最大限制，則取充電樁的最大限制。

Power limit, click the "Settings" button at the bottom, switch to the settings page, click "Charging Current." In the pop-up selector, select the maximum current you want to limit; The maximum limit current should not be less than the minimum limit of the charging pile. If the limit is less than the minimum limit of the charging pile, the minimum limit is taken. The limit of the maximum current can not be greater than the maximum limit of the charging pile, if the maximum limit of the charging pile is greater than the maximum limit, then the maximum limit of the charging pile is taken.

